


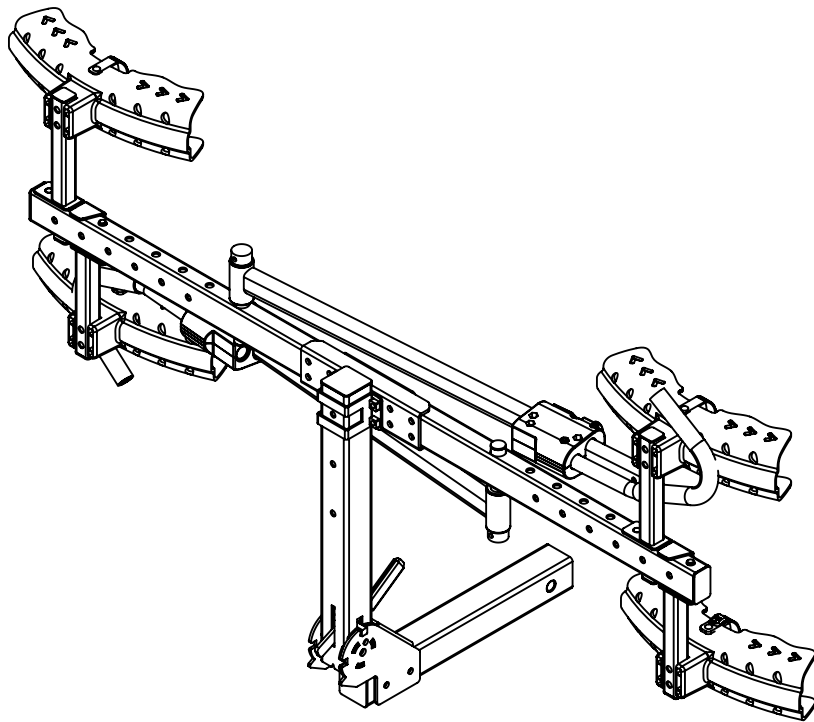
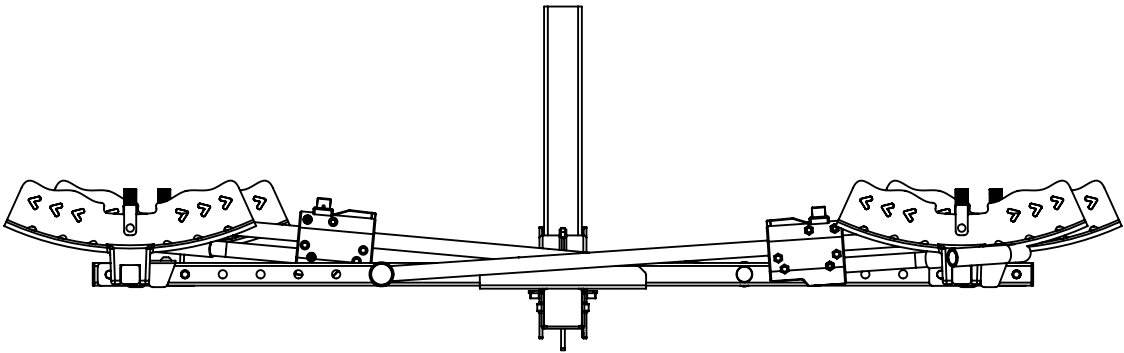
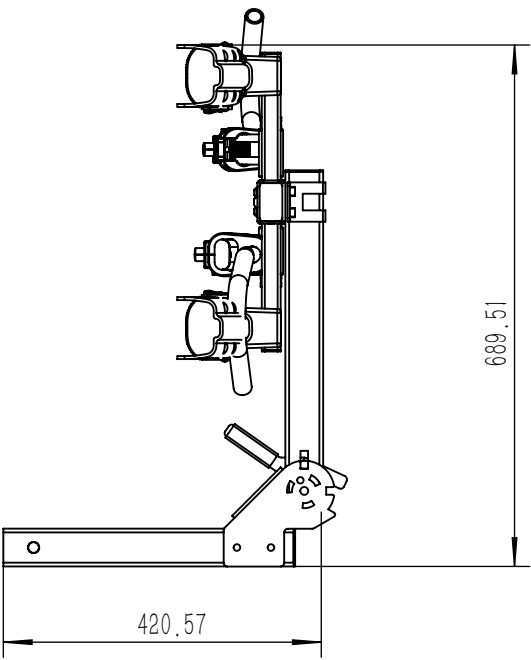
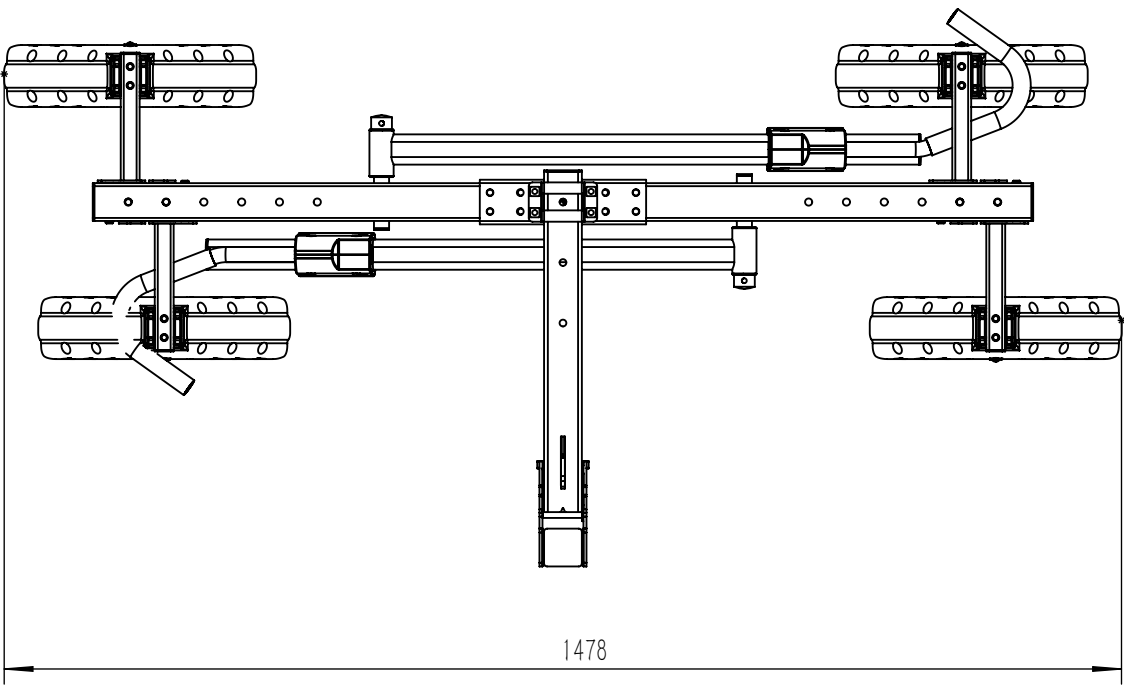
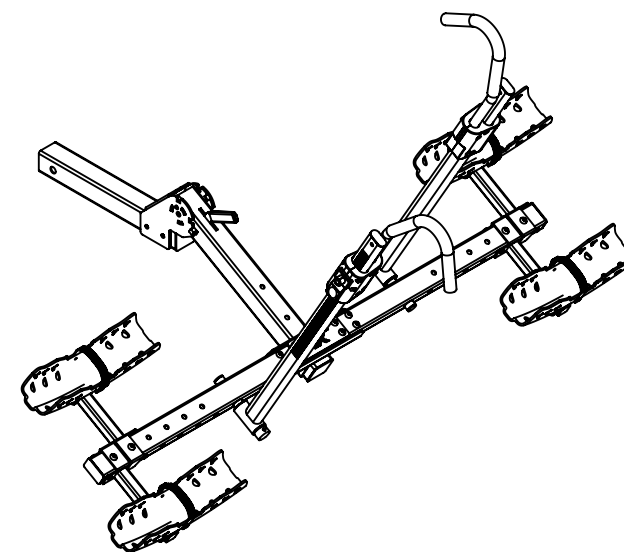
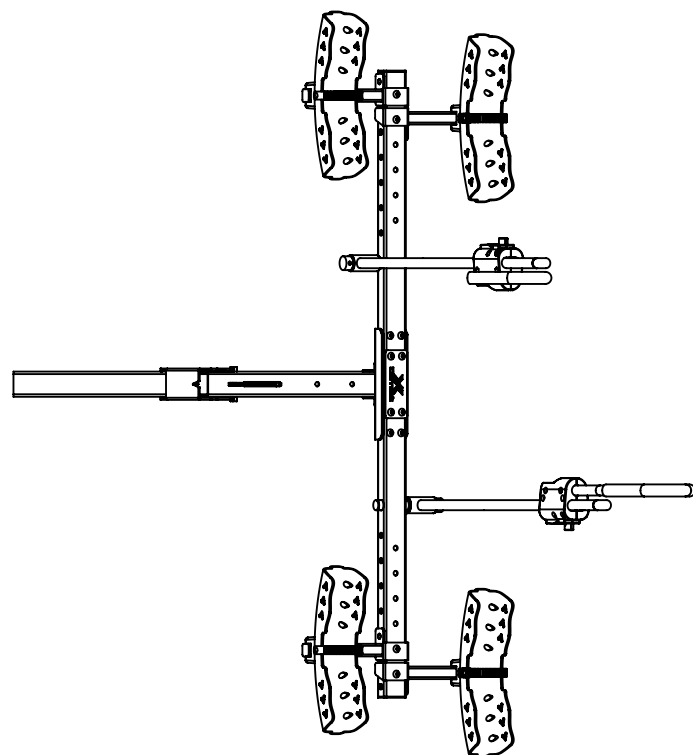
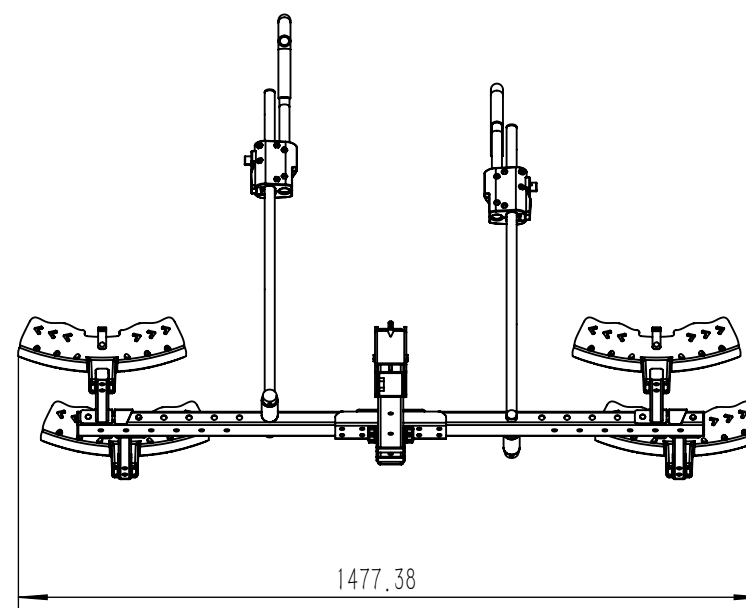
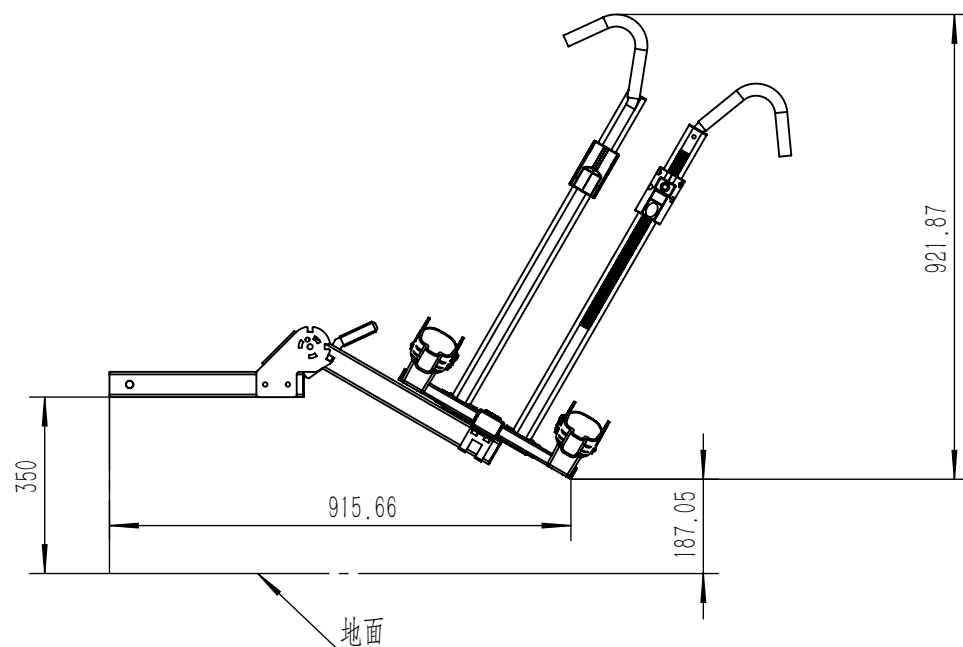


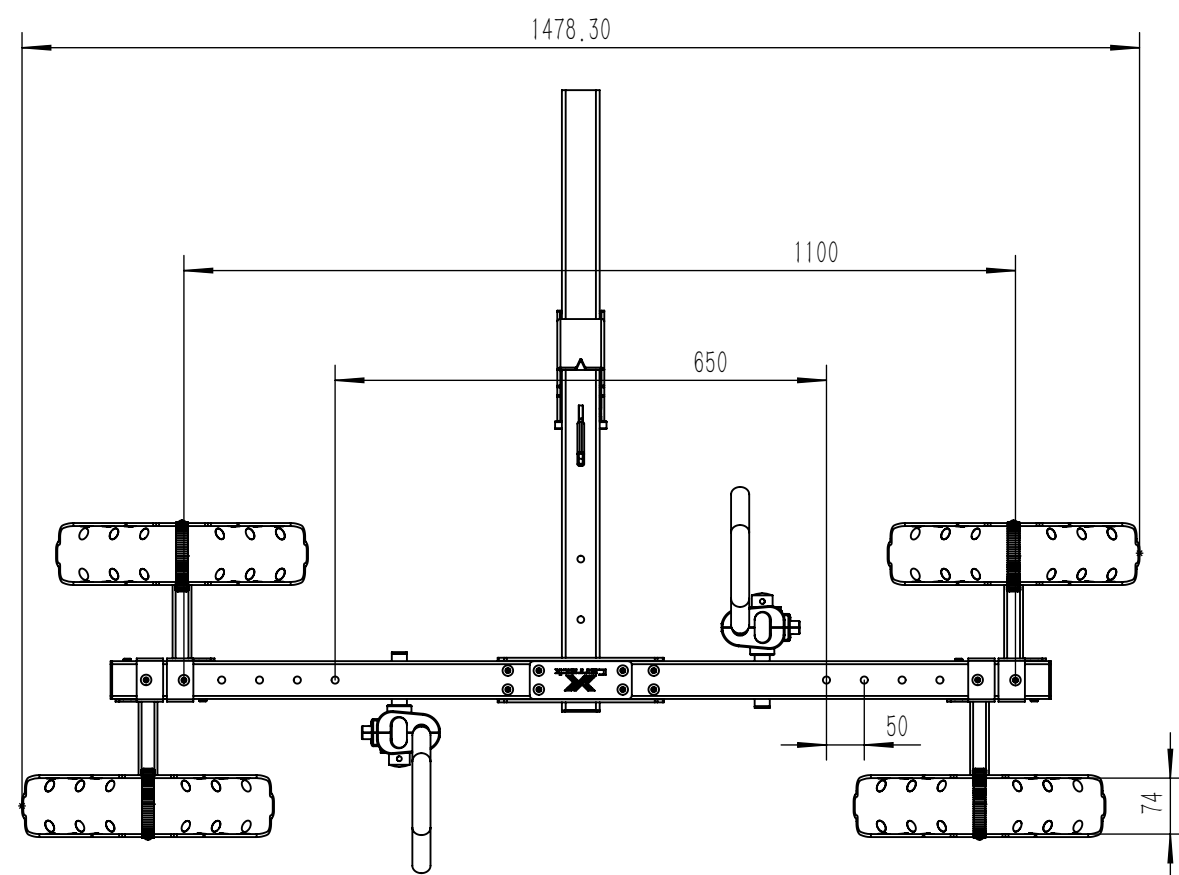


												X-H(P)-02			B01-1
												车位款平台式2车位			
												产品版本号	零件版本号	比例	
公差名称	尺寸分段 (mm)											1	A	1:10	车位款平台式2车位
	0.5-3	3-6	6-30	30-120	120-400	400-1000	1000-2000								
线形公差	±0.2	±0.3	±0.5	±1.5	±2.5	±4	±6								
倒角公差	±0.2	±0.5	±0.1					序号	修订日	修订标识	修订员	13.1231 Kg			
角度公差	±1° 30' (10以下)		±1° (10-50)		±30' (50-120)			设计		审核		第 张			

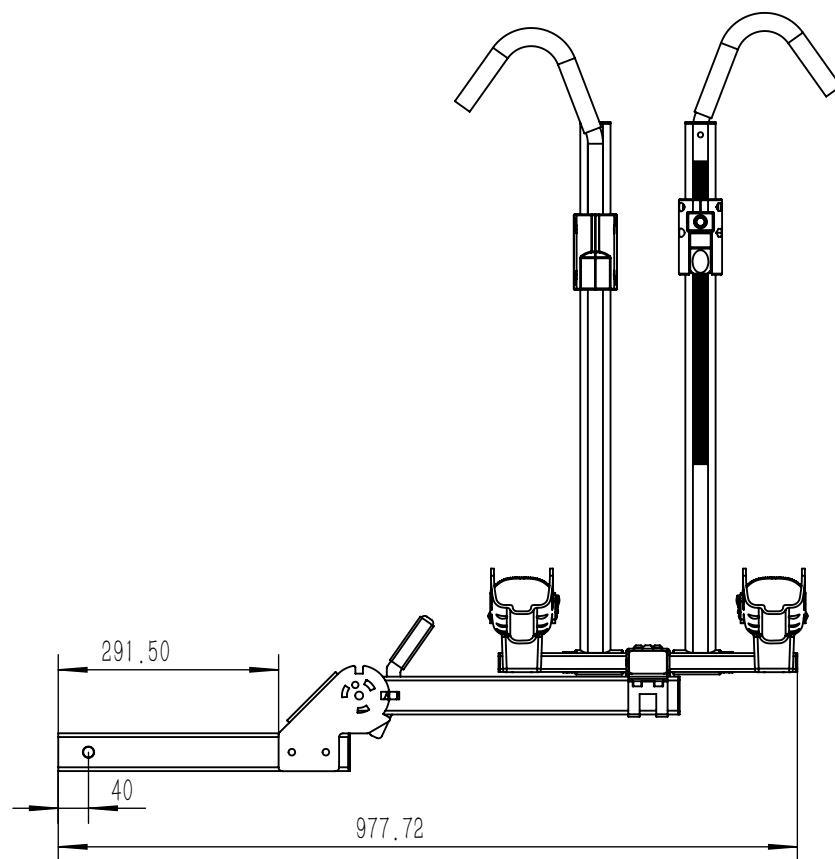

												X-H(P)-02			B01-1
												车位款平台式2车位			
公差名称	尺寸分段 (mm)											产品版本号	零件版本号	比例	车位款平台式2车位
	0.5-3	3-6	6-30	30-120	120-400	400-1000	1000-2000					1	A	1:15	
线形公差	±0.2	±0.3	±0.5	±1.5	±2.5	±4	±6					13.1231 Kg			
倒角公差	±0.2	±0.5	±0.1					序号	修订日	修订标识	修订员				
角度公差	±1° 30' (10以下)		±1° (10-50)		±30' (50-120)			设计		审核		第 张			

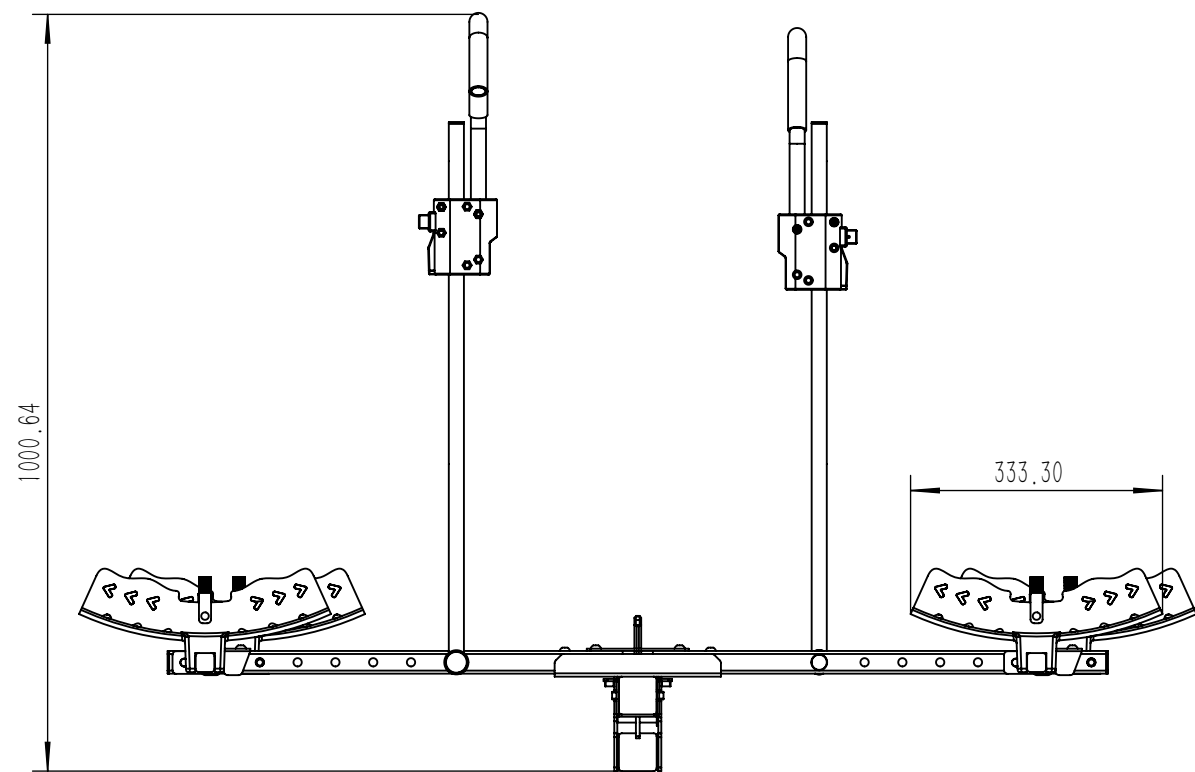

Length adjustable
Max 1100mm
Min 650mm (50mm)

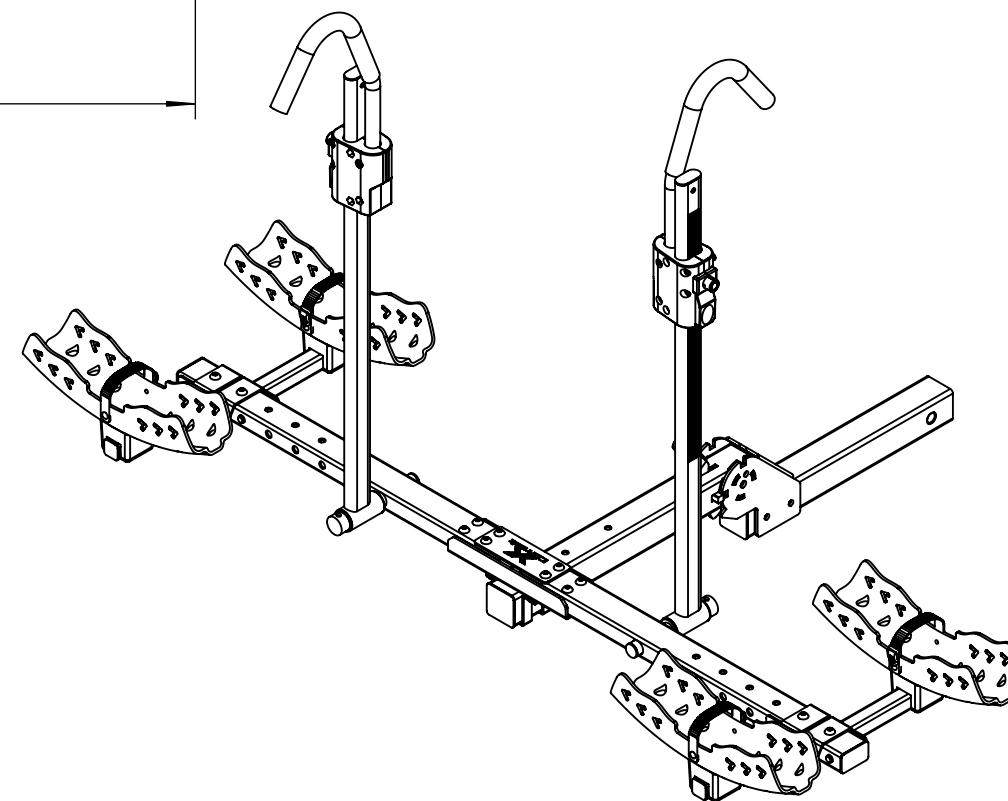

公差名称	尺寸分段 (mm)						
	0.5-3	3-6	6-30	30-120	120-400	400-1000	1000-2000
线形公差	±0.2	±0.3	±0.5	±1.5	±2.5	±4	±6
倒角公差	±0.2	±0.5	±0.1				
角度公差	±1° 30' (10以下)		±1° (10-50)		±30' (50-120)		

				X-H(P)-02			B01-1
				车位款平台式2车位			
				产品版本号	零件版本号	比例	车位款平台式2车位
0				1	A	1:10	
	序号	修订日	修订标识	修订员	13.1231 Kg		
	设计		审核		第 张		